


Figure 5 - Derating Curve for 1794-0B16P

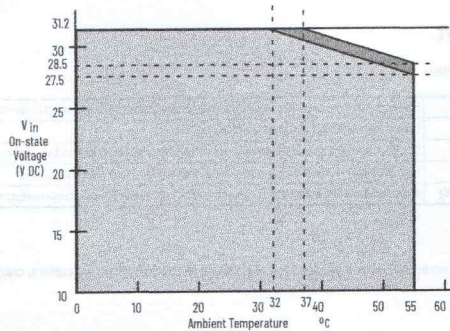

The area within the curve represents the safe operating range for the module under various conditions of user supplied 24V DC supply voltages and ambient temperature.

- [Shaded Area] = Normal mounting safe operating range (includes [Dashed Line Area])
 [Dashed Line Area] = Other mounting positions (including inverted horizontal) safe operating range

Normal Mounting - Horizontal



Other Mounting - (including Vertical and Inverted Horizontal Mounting)

Vertical mounting



Inverted horizontal mounting



Voltage, max	Temperature, max		Voltage, max	Temperature, max	
	Normal	Other		Normal	Other
31.2	37	32	29.0	51	45
30.5	41	36	28.5		48
30.0	45	39	28.0	55	51
29.5	48	42	27.5		55